

WIRQUIN
11 rue du Château
de Bel Air
44482 Carquefou
Cedex FRANCE

WIRQUIN LTD
Unit 3, Alpha Court,
Capitol Park,
Thorne, DN8 5TZ
UNITED KINGDOM

WIRQUIN ROMANIA
Bd. Mielburgiei nr.78,
sector 4,
Bucuresti 041836,
ROMANIA

WIRQUIN IBERICA,
ZI de Abravases,
Pavillao 8,
Visau 3815-157,
PORTUGAL

WIRQUIN CALAF
Poligono Industrial Pla Dels
Vinyals II C/ La Lluna De
Nº 5-7, 08250 Sant Joan De
Vilatorrada Barcelona, SPAIN

WIRQUIN
MANUFACTURING,
2 Bockfields Road,
Karega, Eastern
Cape 6229
SOUTH AFRICA



23


Wyrodo zgodny z normą PN-EN 14055:2018-11, KDMU nr 142018k.
B mark 23.
Maximalny PPN Temp. max. 90°C.



INSTRUCTION



W zestawie śruby!
Includes screws and
wrench.

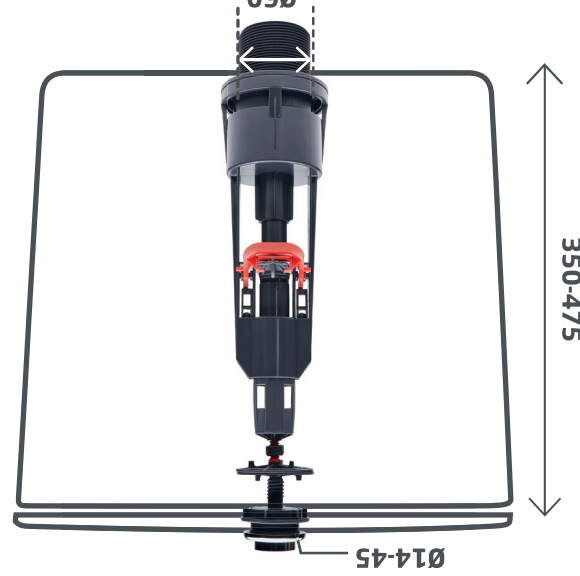


is committed: discover our
sustainable development
report online
www.wirquin.com



10724455
3 375537 242771

220982-A-0212023



FLUSHING VALVE - INTERRUPTABLE
The Aquacontrol command is interruptable: activate
the flush by pressing the button, press again to stop
the flush at the desired time.
Allows water saving.
Lid hole diameter: 14 - 45 mm.
Tank height: 350 - 475mm.



ZAWÓR SPUSTOWY WC Z FUNKCJĄ STOP
Aquacontrol - funkcja STOP: rozpozczynyany
naciśnięcie przerywa spłukiwanie.
Pozwala to oszczędzać wodę.
Średnica otworu w pokrywie: 14 - 45 mm.
Wysokość zbiornika: 350 - 475mm.



AQUACONTROL


ZAWÓR SPUSTOWY WC
z funkcją STOP
FLUSHING VALVE
Interruptable



wirquin

ZAWÓR SPUSTOWY WC
z funkcją STOP
FLUSHING VALVE
Interruptable

AQUACONTROL



FUNKCJA STOP
INTERRUPTABLE



OSZCZĘDNOŚĆ WODY
WATER SAVING



SZYBKA INSTALACJA
QUICK INSTALL



www.wirquin.com

Photos are not contractual