

WIRQUIN FRANCE,
11 rue du Château de Bel
Air, 44482 Carquefou Cedex,
France. Email: SAV@wirquin.
com | N° 0 800 009 003

WIRQUIN LTD,
Unit 3, Alpha Court, Capitol
Park, Thorne, DN8 5TZ,
UNITED KINGDOM,
Email: aftersales@wirquin.co.uk
| N° +44 (0)33 3222 4488

WIRQUIN ROMANIA,
Bd. Metalurgiei nr.78, sector 4,
Bucuresti 041836, ROMANIA,
Email: aftersales@wirquin.
ro | N° +40726780724

WIRQUIN IBERICA,
Z.I. de Mundao 3, Armazem,
E 3505-459, Viseu, PORTUGAL,
Email: wirquinibérica@sapo.
pt | N° +34 938787816

WIRQUIN CALAF,
Poligono Industrial Pla Dels
Vinyals II C/ La Llum N° 5-7,
08250 Sant Joan De Vilatorrada
Barcelona, SPAIN. Email: safi@
wirquin.com | N° +34 938787816

WIRQUIN MANUFACTURING,
2 Brickfields Road, Alexander
Cape Park, Kanyaga, Eastern Cape
6229, SOUTH AFRICA. Email:
enquiries@wirquin.co.za |
N° +27 (0)42 243 6000



TOPY

Servo-válvula lateral
Side entry inlet valve
Alimentation latérale

Universal, siendo ideal para cerámicas de baja altura o con formas curvas. Entrada de latón 3/8". Silencioso: 24 dBA. Rango de funcionamiento: 0,1 - 16 bares.
Universal sendo ideal em cerâmicas com pouca altura ou formas curvas. Entrada em latão 3/8". Silencioso: 24 dBA. Gama de funcionamento: 0,1 - 16 bares.
Universal, idéal for low or curved ceramics. 3/8" brass inlet. Silent. 24 dBA. Operating range: 0,1 - 16 bar.
Idéal dans les céramiques très basses ou à formes incurvées. Robinet flotteur servo-válve - embout laton 3/8". Silencieux : 24 dBA. Plage de fonctionnement : 0,1 - 16 bars

Resistente a picos de presión hasta 20 bares
Resistance to pressure up to 20 bar.
Résiste à des pics de pression jusqu'à 20 bars

Caudal de bóia: 7,9 L/min a 3 bares. Velocidade de enchimento: 6 L em 46 segundos a 3 bar..
Float flow: 7,9 L/min at 3 bar. Filling speed: 6 L in 46 seconds at 3 bar
Débit robinet flotteur : 7,9 L/min à 3 bars. Vitesse de remplissage : 6 L en 46 secondes à 3 bars.



BA010721842_A-09/2025


TOPY

ES Grifo flotador servo-válvula PT Torneira de bóia com servoválvula, alimentação lateral, entrada em latão de 3/8", enchimento rápido 6 l em 46 segundos con presión de 3 bares, regulación del nivel de agua. Clase acústica: 1. Caudal: 0,13L/segundo.

EN Side entry inlet valve with 3/8" brass inlet, fast filling at 3 bar pressure with water level adjustent. Flow rate: 0,13 L/second. Ajuste de nível de água: 0,13L/seg

FR Robinet flotteur LATON 3/8" COMPACTO SILENCIEUX

GRIFO FLOTADOR ULTRACOMPACTO TORNEIRA DE BÓIA ULTRACOMPACTA

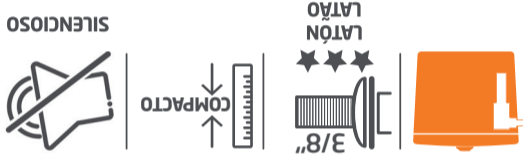

GRIFO FLOTADOR ULTRACOMPACTO TORNEIRA DE BÓIA ULTRACOMPACTA

Servo-válvula lateral

Servo-válvula lateral

TOPY



wirquin



COMPOSANTS SANITAIRES