






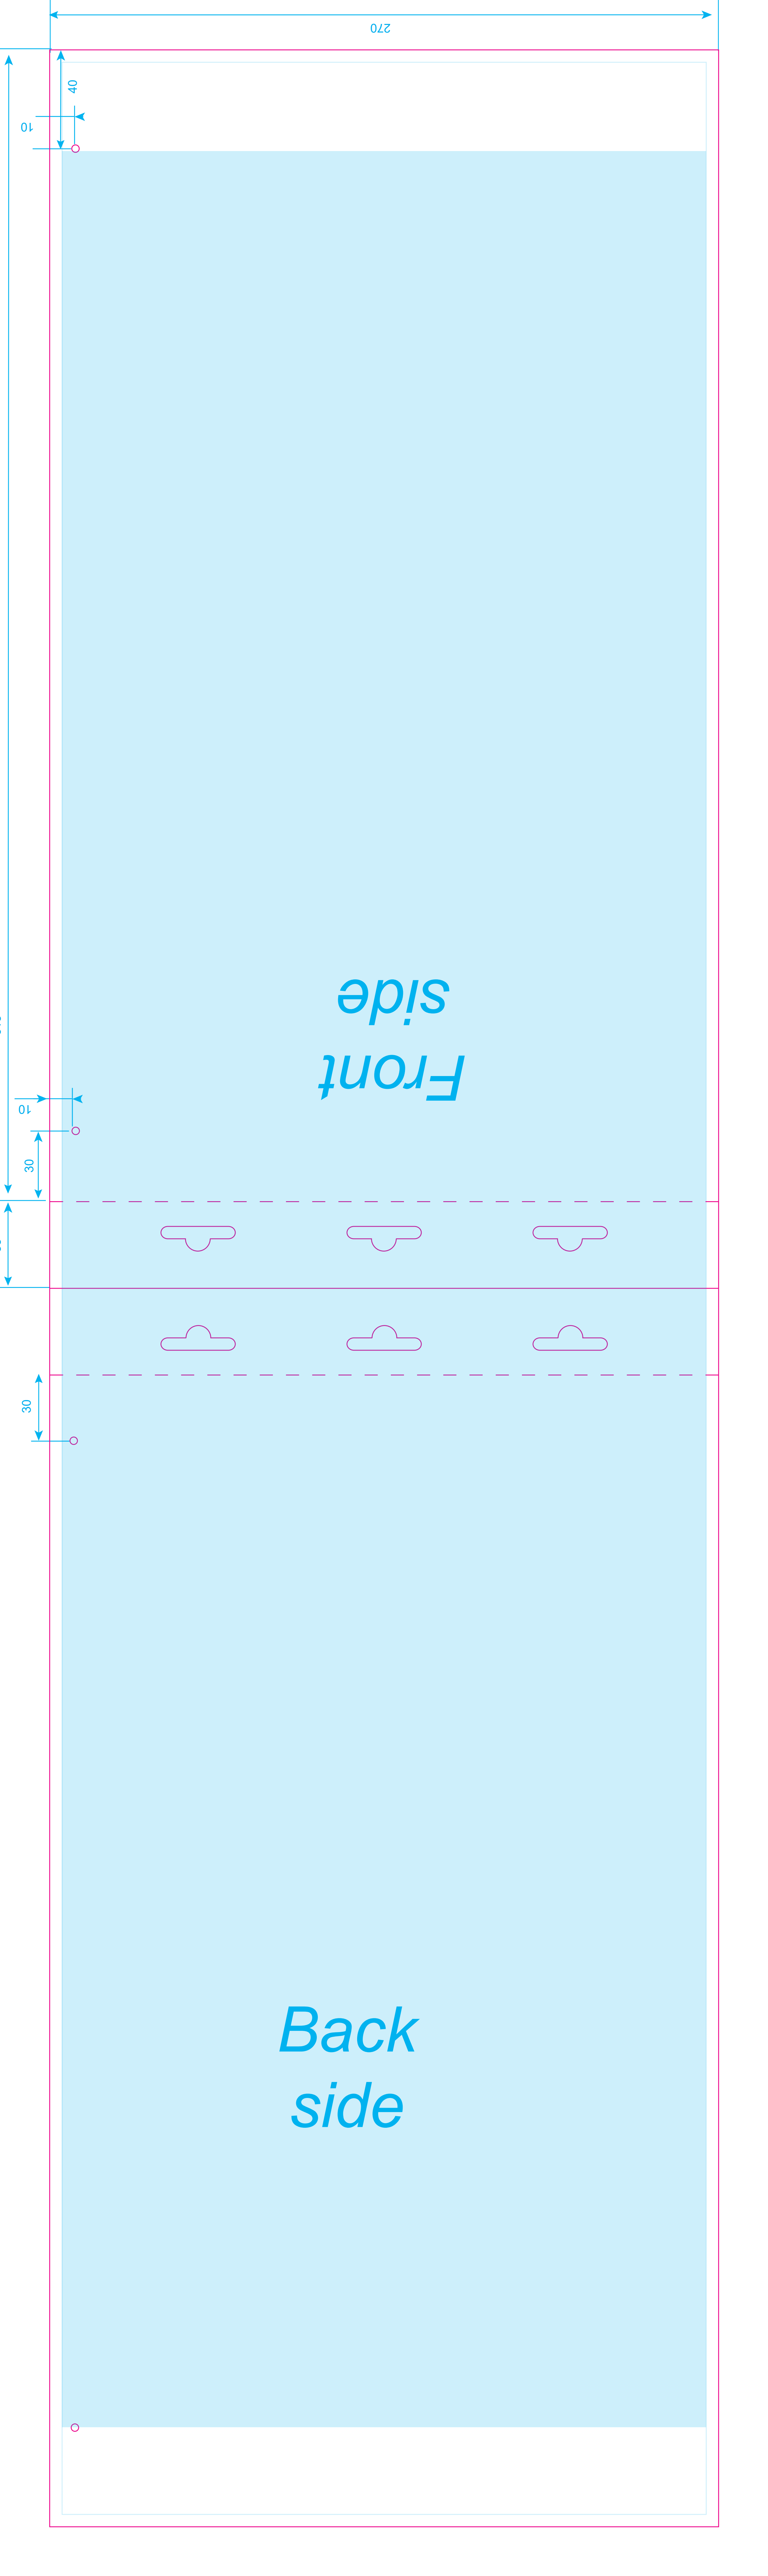



VIDAGE BAIGNOIRE
câble rentrant laiton
CABLE BATH WASTE
brass internal plug



VIDAGE BAIGNOIRE
câble rentrant laiton
CABLE BATH WASTE
brass internal plug



FR Débit 55L/min. Garde d'eau 50 mm. Sortie orientable pour faciliter le raccordement à l'évacuation.

IT Portata 55L/min. Chiusura idraulica: 50 mm. Uscita orientabile per facilitare il collegamento al tubo di scarico.

RO Debit apă 55L/min. Etanșare: 50 mm. Conector rotativ pentru o conectare ușoară la scurgere.

EN Flow rate 55L/min. Waterseal: 50mm. Swivelling outlet for easy connection to the drain.

PT Caudal 55L/min. Guarda de água: 50 mm. Saída Orientável para facilitar a conexão com tubo de escoamento.

RU Р/С Расход 55л/мин. Гидрозатвор 50мм. Поворотный выпуск для удобного соединения.

NL Debiet 55L/min. Waterslot 50 mm. Richtbare uitgang om de aansluiting aan de afvoer te vergemakkelijken.

DE Durchfluss 55L/min. Wasserverschlusshöhe 50 mm. Drehbarer Abgang für problemlosen Anschluss am Abflusssrohr.


GR Ροή: 55L/λεπτό. Στάθμη νερού 50mm. Ρυθμιζόμενη έξοδος για διευκόλυνση της σύνδεσης με την αποχέτευση.

ES Caudal 55L/min. Agua residual: 50 mm. Salida orientable para facilitar la conexión al desagüe.

PL Przepływ wody 55L/min. Słup wody: 50 mm. Obrotowy wylot ułatwiający podłączenie do odpływu.

BG Дебит 55 л/мин. Воден затвор: 50 mm. Въртящ се извод за лесно свързване към канализацията.

Encombrement sous baignoire : 125 mm.
Conseil d'entretien : Pour protéger votre installation nous vous recommandons de ne pas utiliser de produits d'entretien ou de débouchage à base d'acide sulfurique.
Profile height: 125 mm under bath.
Care recommendations: To protect your system, we recommend against using cleansers or drain cleaners containing sulfuric acid.

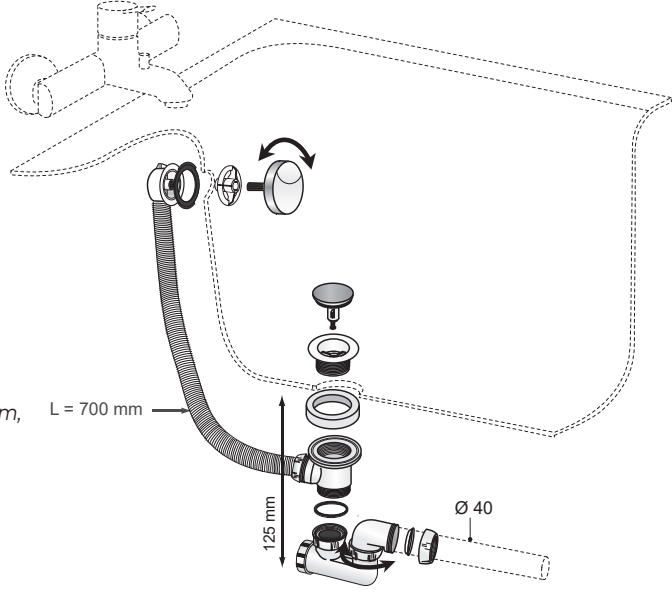

is committed: discover our sustainable development report online

www.wirquin.com
30723172

3 375537 230525

RECYCLEZ
REEMPLOYEZ
ASSOCIATION

OU
DISTRIBUTEUR

OU
DÉCHÈTESE

Références sur quefairemesdechets.fr

221434-11/2024

WIRQUIN
11 rue du Château de
Bel Air, 44482 Carquefou
Cedex, FRANCE


WIRQUIN LTD
Unit 3, Alpha Court, Capitol
Park, Trone, BN8 5TZ,
UNITED KINGDOM

WIRQUIN ROMANIA
Bd. Metalurgiei nr 78,
sector 4, Bucuresti
041836, ROMANIA

WIRQUIN IBERICA
Z.I. de Mundão - 3 Armazém,
E-3305-459, Viseu,
PORTUGAL

WIRQUIN CALAF
Polígono Industrial Pla dels Vinyals
II C/ La Llum Nº 5-7, 08250 Sant Joan
De Vilatorrada Barcelona,
SPAIN

WIRQUIN MANUFACTURING
2 Brickfields Road, Alexander Park,
Karega, Eastern Cape 6229,
SOUTH AFRICA

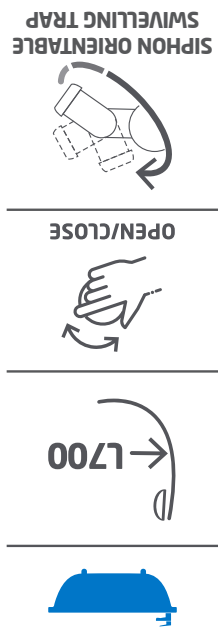

VIDAGE BAIGNOIRE
clapet rentrant laiton
CABLE BATH WASTE
brass internal plug



VIDAGE BAIGNOIRE
clapet rentrant laiton
CABLE BATH WASTE
brass internal plug



FR Débit 55L/min. Garde d'eau 50 mm. Sortie orientable pour faciliter le raccordement à l'évacuation.

IT Portata 55L/min. Chiusura idraulica: 50 mm. Uscita orientabile per facilitare il collegamento al tubo di scarico.

RO Debit apă 55L/min. Etanșare: 50 mm. Conector rotativ pentru o conectare ușoară la scurgere.

EN Flow rate 55L/min. Waterseal: 50mm. Swivelling outlet for easy connection to the drain.

PT Caudal 55L/min. Guarda de água: 50 mm. Saída Orientável para facilitar a conexão com tubo de escoamento.

RU Р/С Расход 55л/мин. Гидрозатвор 50мм. Поворотный выпуск для удобного соединения.

NL Debiet 55L/min. Waterslot 50 mm. Richtbare uitgang om de aansluiting aan de afvoer te vergemakkelijken.

DE Durchfluss 55L/min. Wasserverschlusshöhe 50 mm. Drehbarer Abgang für problemlosen Anschluss am Abflusssrohr.

GR Ροή: 55L/λεπτό. Στάθμη νερού 50mm. Ρυθμιζόμενη έξοδος για διευκόλυνση της σύνδεσης με την αποχέτευση.

ES Caudal 55L/min. Agua residual: 50 mm. Salida orientable para facilitar la conexión al desagüe.

PL Przepływ wody 55L/min. Słup wody: 50 mm. Obrotowy wylot ułatwiający podłączenie do odpływu.


BG Дебит 55 л/мин. Воден затвор: 50 mm. Въртящ се извод за лесно свързване към канализацията.

Photos are not contractual - 03/2022



Encombrement sous baignoire : 125 mm.
Conseil d'entretien : Pour protéger votre installation nous vous recommandons de ne pas utiliser de produits d'entretien ou de débouchage à base d'acide sulfurique.
Profile height: 125 mm under bath.
Care recommendations: To protect your system, we recommend against using cleansers or drain cleaners containing sulfuric acid.

L = 700 mm

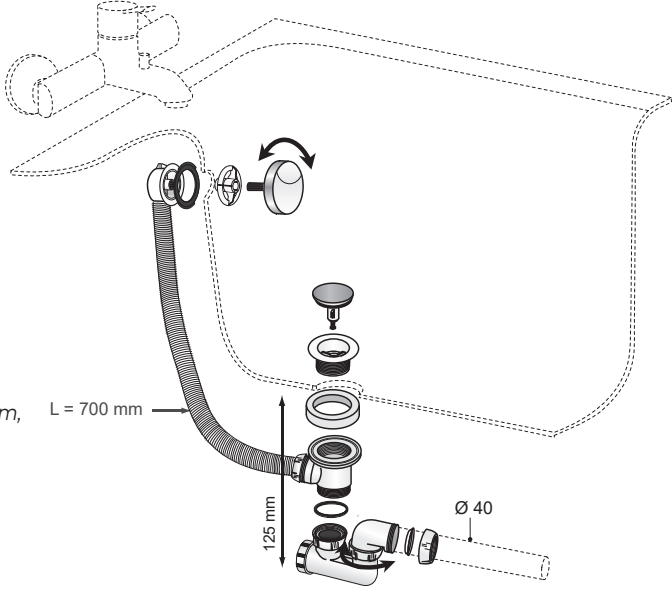


www.wirquin.com

30723172



221434-11/2024



WIRQUIN
11 rue du Château de
Bel Air, 44462 Cerquefou
Cedex, FRANCE

WIRQUIN LTD
Unit 3, Alpha Court, Capitol
Park, Trone, BN8 5TZ,
UNITED KINGDOM

WIRQUIN ROMANIA
Bd. Metalurgiei nr 78,
sector 4, Bucuresti
041836, ROMANIA

WIRQUIN IBERICA
Z.I. de Mundão - 3 Armazém,
E-3305-459, Viseu,
PORTUGAL

WIRQUIN CALAF
Polígono Industrial Pla dels Vinyals
Il·l. C/ La Lluna Nº 5-7, 08250 Sant Joan
De Vilatorrada Barcelona,
SPAIN

WIRQUIN MANUFACTURING
2 Brickfields Road, Alexander Park,
Karega, Eastern Cape 6229,
SOUTH AFRICA