

► Easy cleaning: direct access to the trap from above
 ► Supplied with anti-cracking sealing flap for waterproofness
 ► Adjustable in height with adjustable feet

BRUSHED

Ultra high flow rate: up to 84 L/mn (in 20 mm of One-piece trough with trap on the whole lenth of

217488_A - 02/2016 Photos are not contractual.

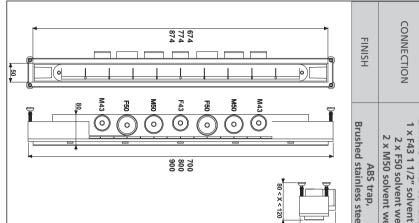

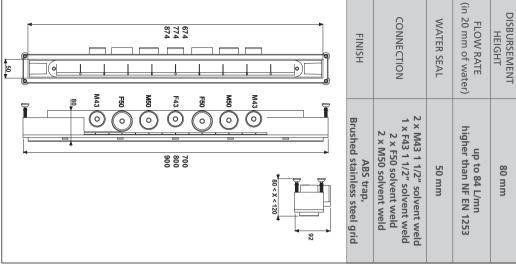



(

WIRQUIN
11 rue du Château de Bel Air
44482 Carquefou cedex FRANCE
www.wirquin.com







